




PowerLead Puto PLD003 Screen Replacement

This guide shows you how to replace the PowerLead Puto PLD003 LCD screen.

Written By: Justin Tew

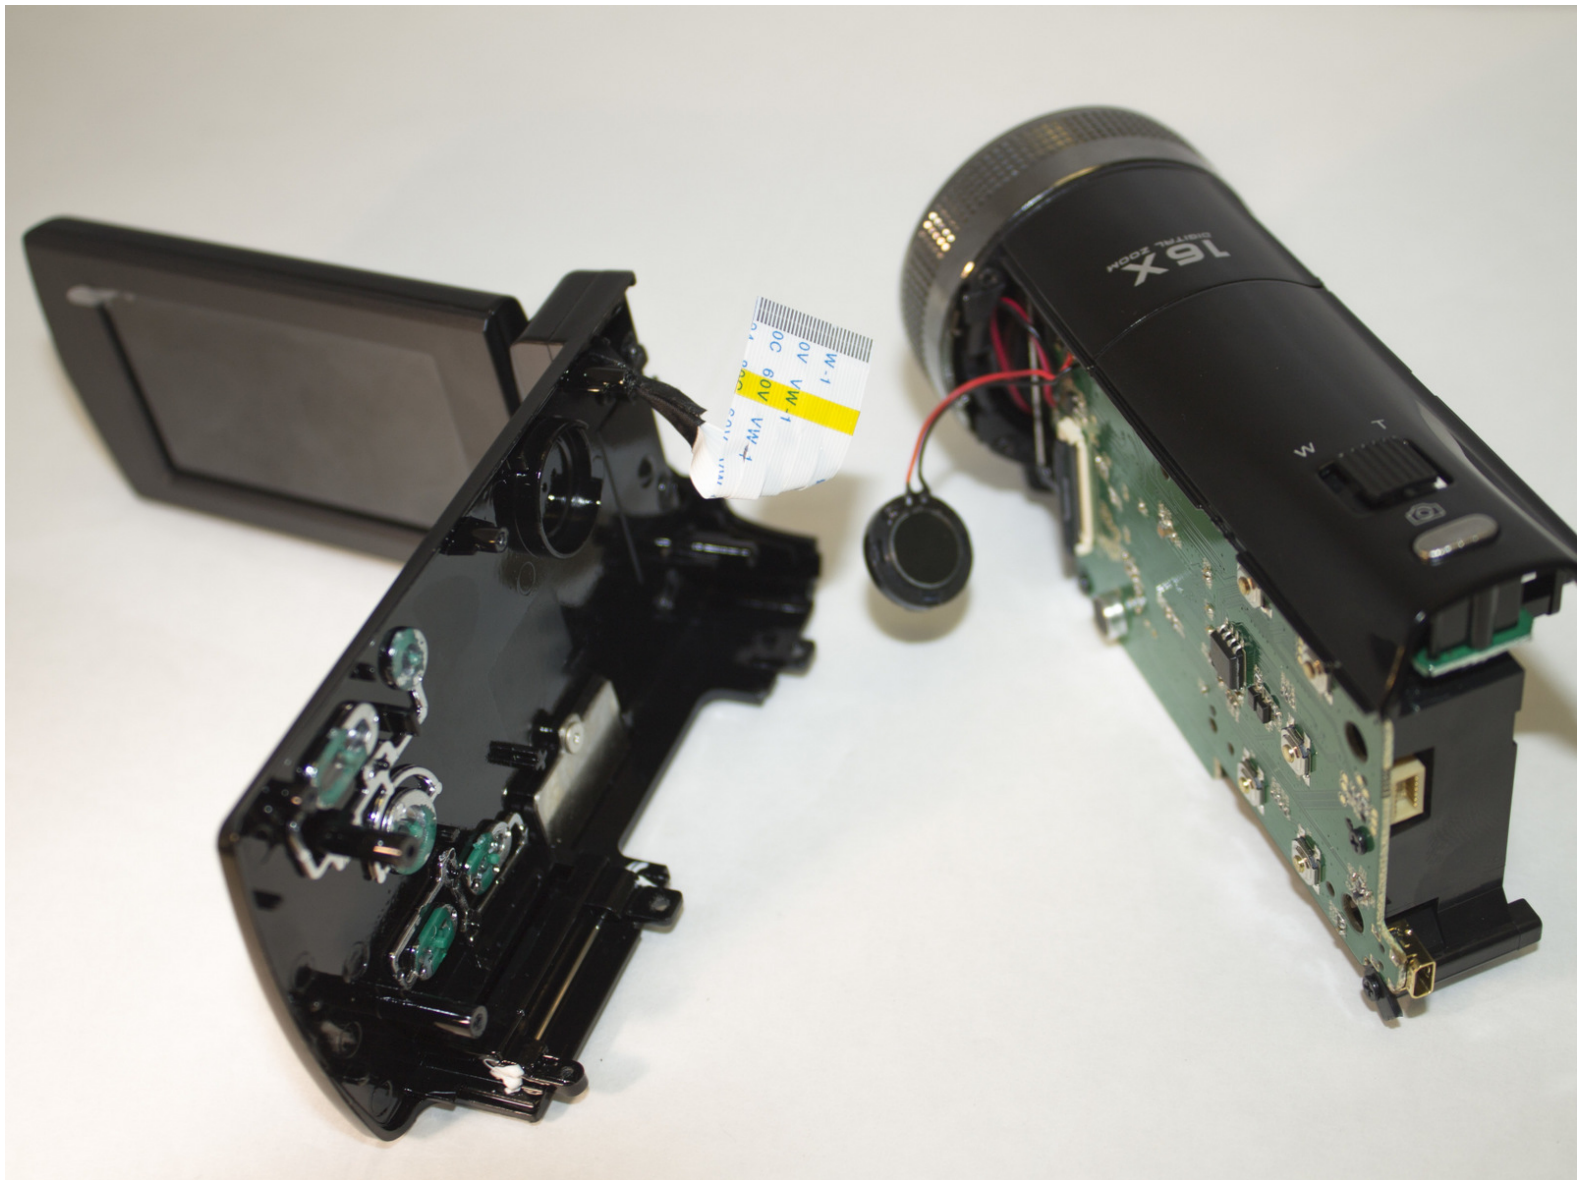

INTRODUCTION

This guide shows how to remove the side panel from the camera, how to remove the back panel, and how to replace the LCD screen.



TOOLS:


- [Phillips #1 Screwdriver](#) (1)



PARTS:


- [replacement LCD screen](#) (1)

Step 1 — Side Panel

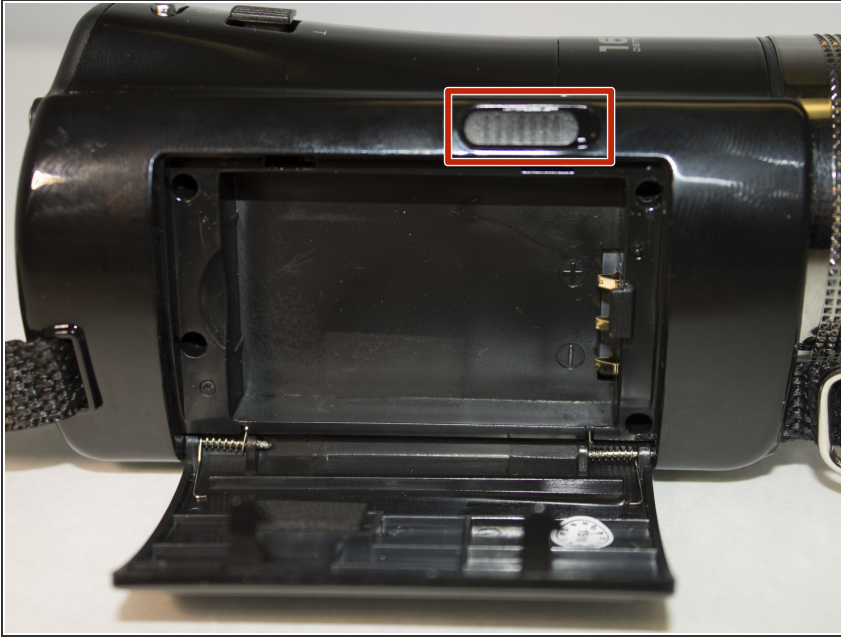

- Slide the battery eject button to open battery door.

Step 2

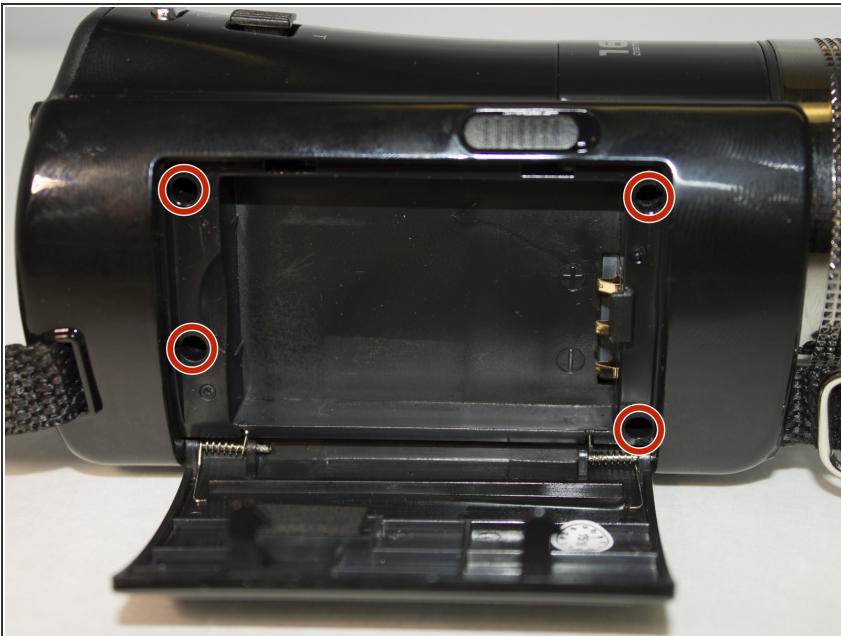


- With the battery door open, carefully unscrew all four 5mm Phillips #1 screws.

Step 3





- Place the camera so that the underside is facing up.
- Using your Phillips screw driver, carefully remove the four 5mm Phillips #1 screws.

Step 4

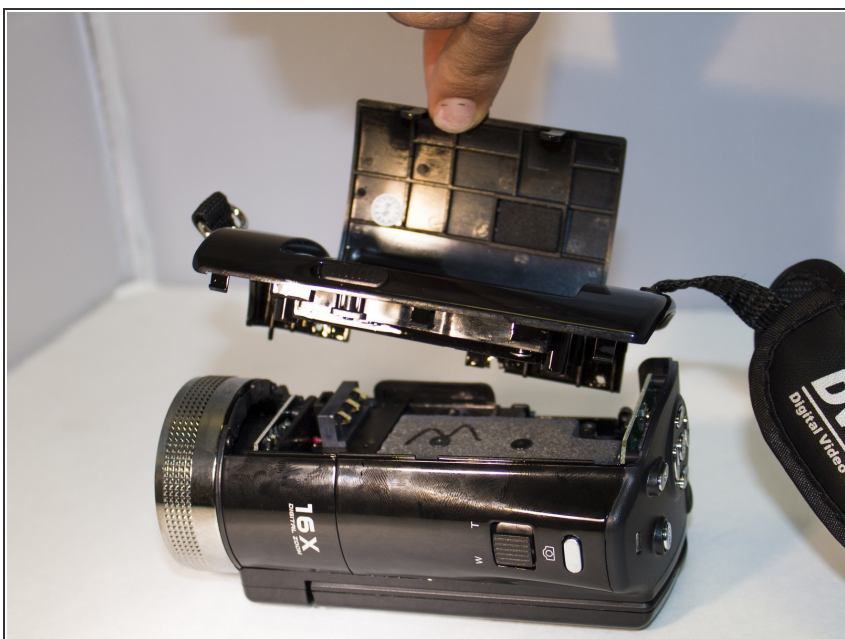


- Place the camera on its side with the screen facing down.
- Gently pull up on the side panel to remove it from the camera.

Step 5 — Screen

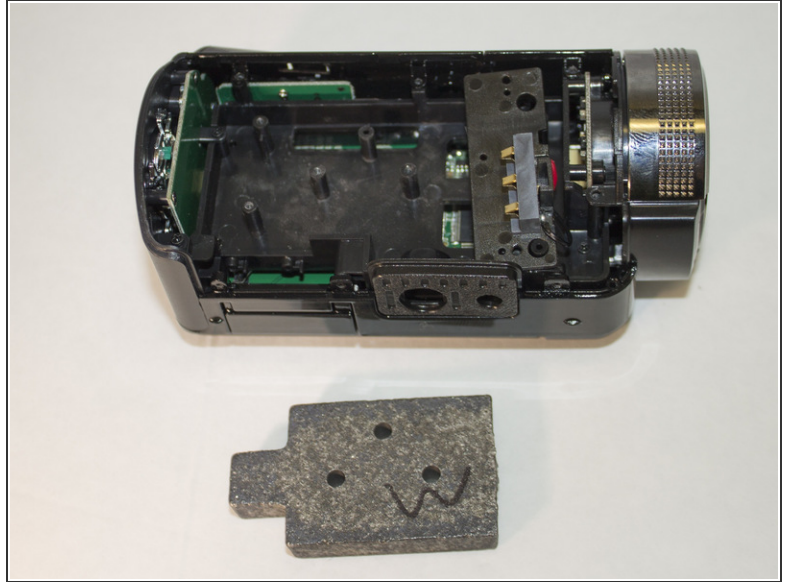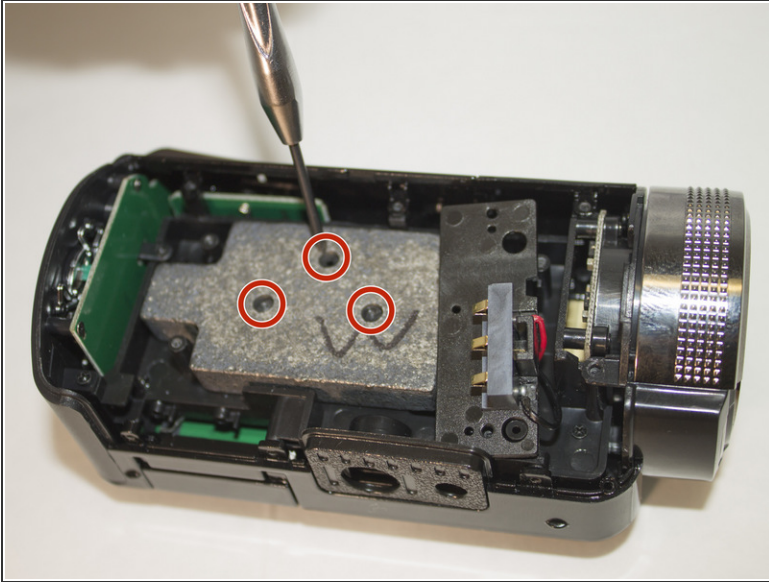


- Remove the three 4 mm Phillips #1 screws holding the weight.
- Remove the weight.

Step 6

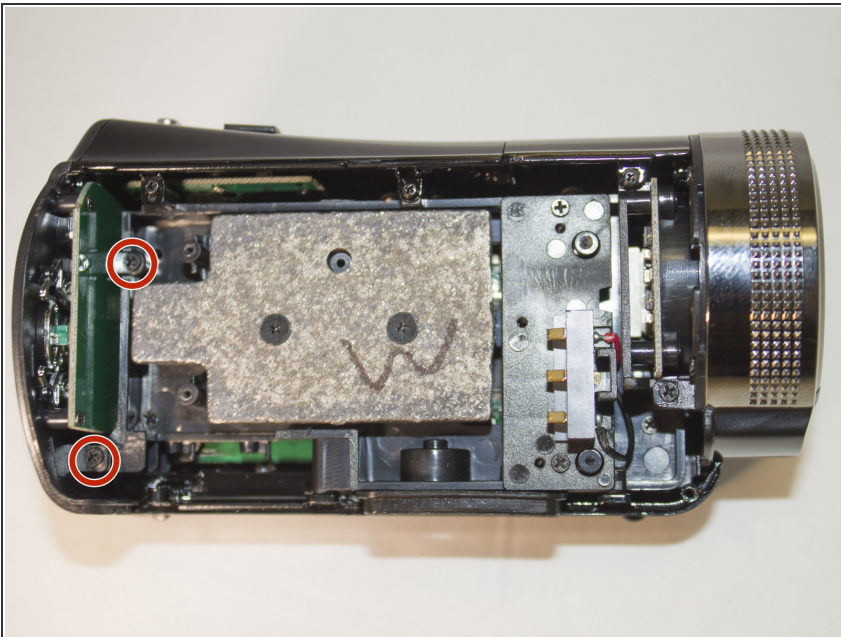



- Remove the two 4 mm Phillips #1 screws holding the back panel in place.

Step 7

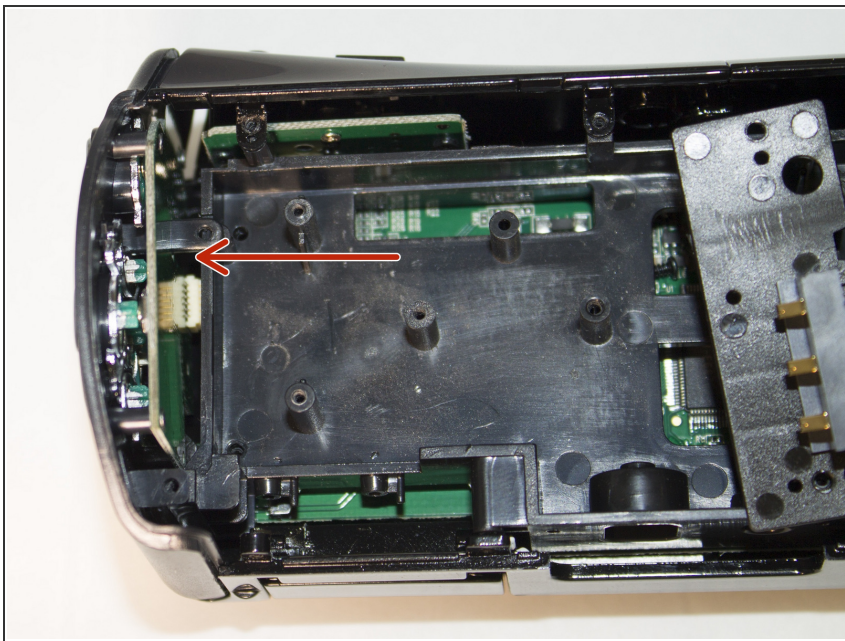


- Apply pressure to the back panel, away from the camera to remove.

Step 8

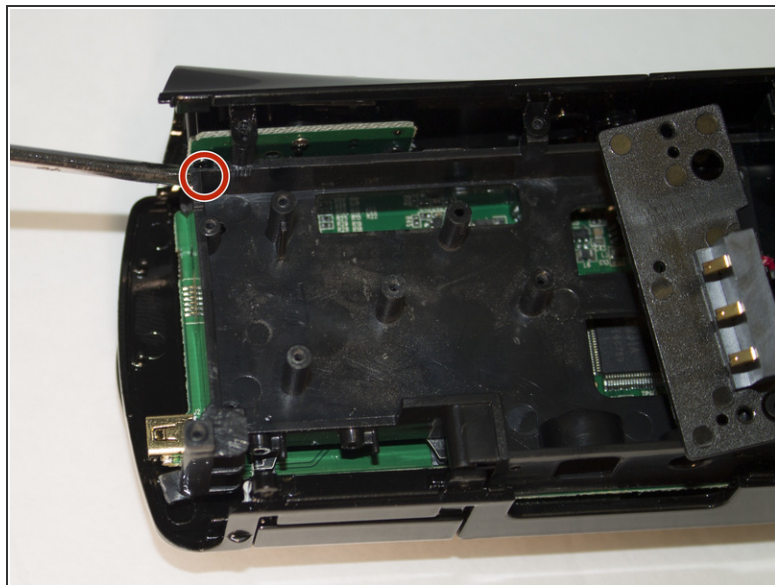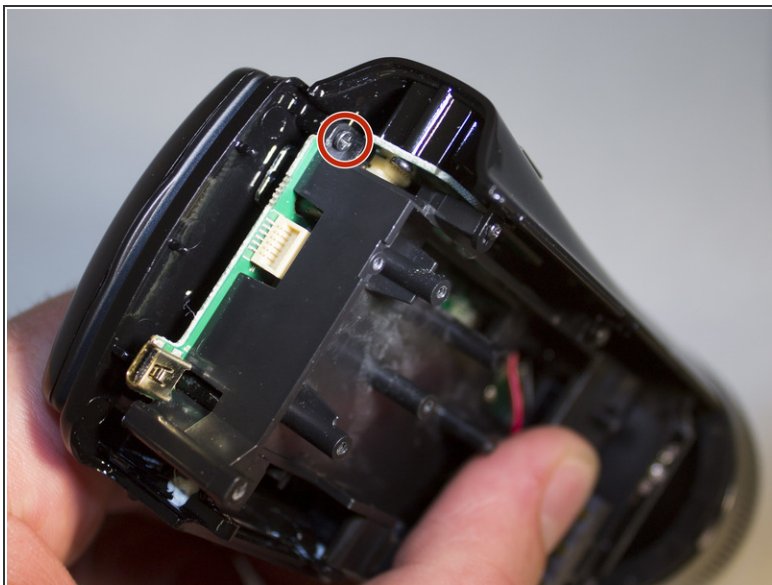



- Set aside back panel for now.
- Remove the final 4 mm Phillips #1 screw holding the screen in place. It is very small and hard to see.

Step 9

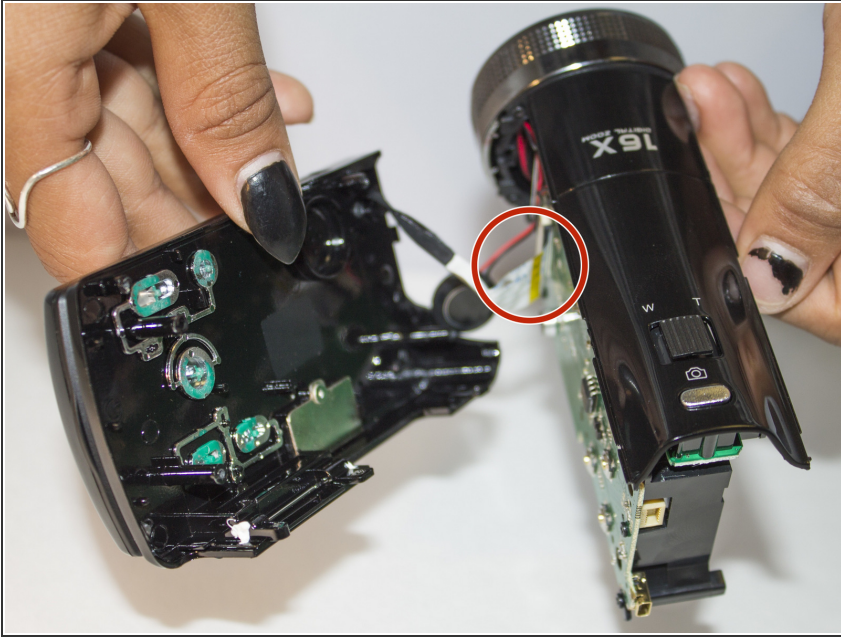


- Carefully apply pressure, away from the camera, to the screen to detach it from the body.
- The white cord should still be connected to the body.

Step 10

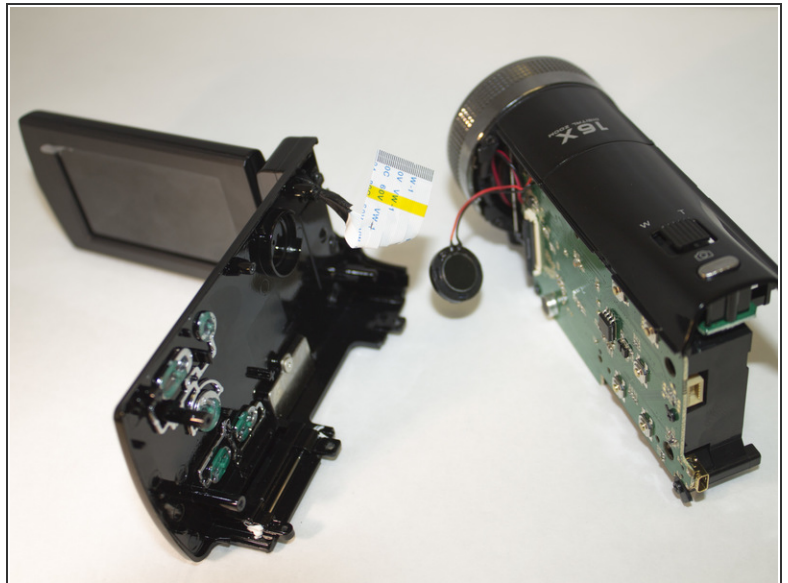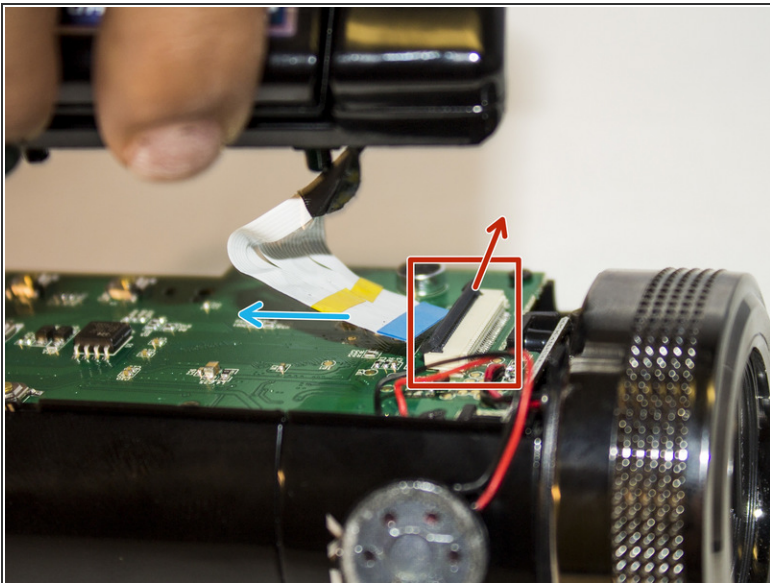

- Lift the black clip upward (the direction of the red arrow).
- With the clip up, pull the white cord to the left (the direction of the blue arrow). This will detach the screen from the body.

Step 11

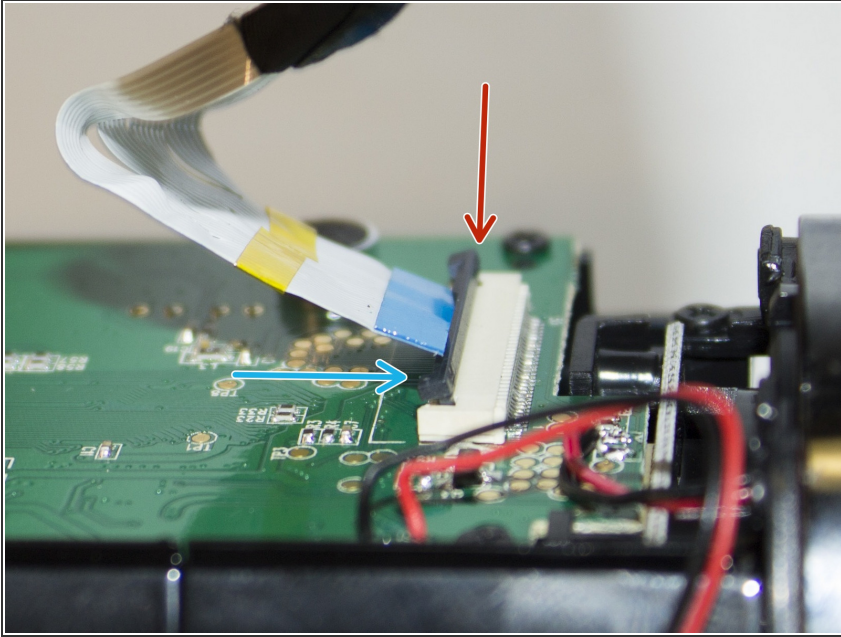

- Use the same technique you used to remove the screen to connect the new screen.
- Slide the white cord into the connector with the blue side facing up.
- Push down the black clip to lock the screen into place.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-09 01:47:06 AM.